

EXC-W64BRH Multi-pixel LED Wall Washer	
	Description
	EXC-W64BRH full color series are high power outdoor landscape LED wall washer with high strength aluminum alloy housing by EXC-LED. EXC-W64BRH can be used for accent lighting or flood lighting, such as building facade, bridge, stage, etc. Customized lighting fixture length available. Features
Application Environment: Indoor Outdoor	 Professional comb convection heat dissipation design Unique waterproof and breathable design Low thermal resistance path heat dissipation design Outdoor lightning protection and electrostatic discharge (ESD) protection design Projection distance: 1-8m


Basic Specifications	
Color Range	W(2200K-6500K)
Light Source	24/36
Working Voltage	AC 220V
Max. Power Consumption	48W/54W(White)
Control	DMX512, ON/OFF
Segment	1,2
Grey Scale	8bit, 16bit
Source Life	50,000 h
RDM	Optional
LED chip Brand	Optional(Cree, OSRAM, Lumileds, Epistar, etc)
Housing	High Strength Aluminum
Cover	Tempered glass
Weight	2.6KG
Working Temperature	-40°C to 60°C
Storage Temperature	-40°C to 70°C
Protection Rating	IP66



聚焦LED点光源 专注LED景观照明 Focus on LED Pixel Light, Specialized in LED Landscape Lighting.

Efficiency flux	≥70LM/W(White),≥45LM/W(RGBW),≥30LM/W(RGB)
Beam Angle	10*65°,30°,45°,60° and other beam angle available
Host Controller	EXC-5200
Slave Controller	EXC-2905T1
Signal Cable	EXC-LED outdoor special cable
Light Intensity Distribution	1
Light Intensity Chart	-90 - 60 - 90 - 60 - 90 - 60 - 90 - 60 - 90 - 60 - 90 - 0 - 0 - 0 - 0 - 0 - 0 - 0 - 0 -



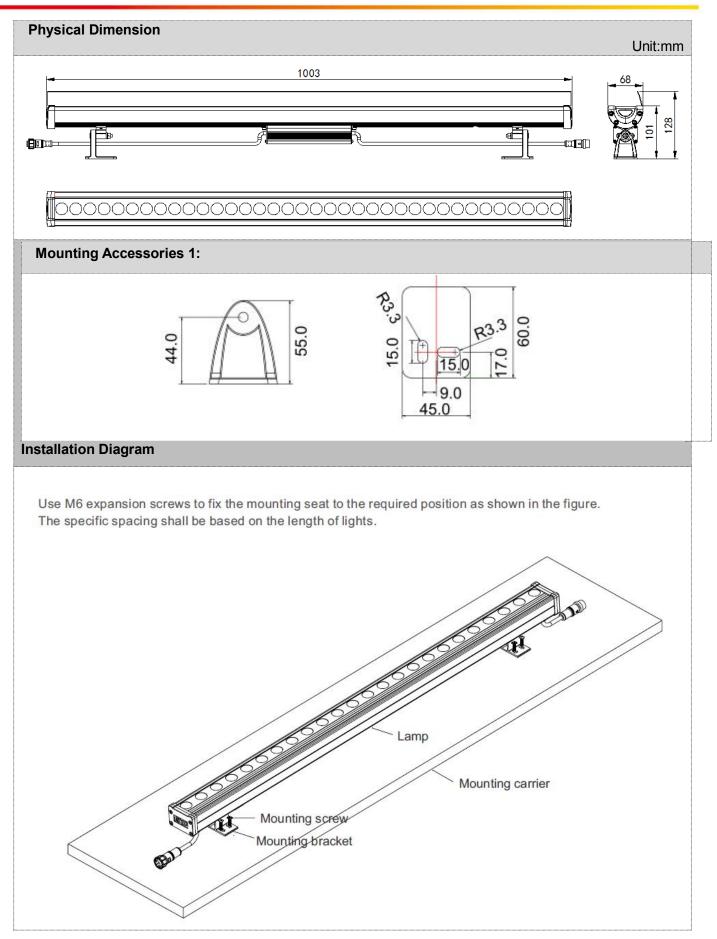




System connection diagram:

1, Host controller should connect with slave controller. Working voltage for controllers are AC220V.

- 2,On-line main controller should connect with slave controller, on-line main controller and sub controller working voltage are AC220V.
- 3,Each sub-controller with 8 ports, with each port 512 pixels, supporting data converter, supports 100 meters ultra-long haul transmission.
- 4, The CAT-5 e. cable distance should be within 100 meters between host controller and slave controller, between slave controllers and switch, etc.

Online Controlling System Diagram

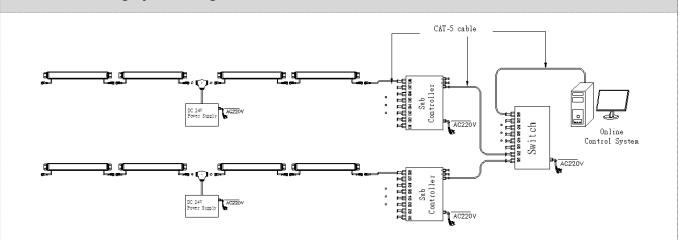

Offline Controlling System Diagram

